



地址:江阴市徐霞客镇峭岐霞迎路32号

Add:No.32 Xiaying Road Qiaoqi Xuxiake Town,

Jiangyin City,Wuxi,Jiangsu,China

电话(Tel):+86-18861610059

E-mail: info@aupujx.com

Whatapp: +86-18861610059

WWW.AUPWIT.COM

金属屑自动压块处理系统

METAL SHAVINGS AUTOMATIC BRIQUETTING PROCESSING SYSTEM

202607 Version

江苏奥普威特重工有限公司
JIANGSU AUPWIT INDUSTRIAL CO.,LTD.

◎ Y85系列中大型压块机 Y85 Series Medium and Large Briquetting Machine



Y85-250 压块机 Briquetting Machine




Y85-315 压块机 Briquetting Machine



Y85-400 压块机 Briquetting Machine



Y85-500 压块机 Briquetting Machine

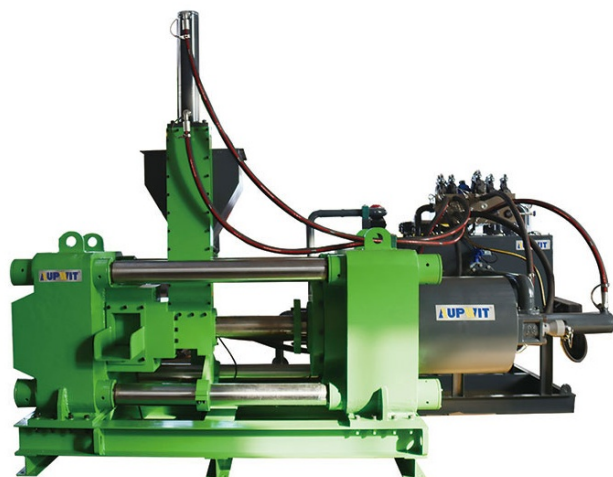

Y85-630 压块机 Briquetting Machine



Y85-800 压块机 Briquetting Machine

金属屑自动压块处理系统 METAL SHAVINGS AUTOMATIC BRIQUETTING PROCESSING SYSTEM



压块机介绍 Briquetting machine

压块机通过液压系统提供的压力通过冷挤压的方式将松散的碎切屑屑压成密实的压块。可处理铁屑、铝屑、铜屑、木屑、磨床屑、钛屑、各种锯床屑、车加工屑等。具有全自动工作、数据统计完善、运行工况实时监控、独特的液压回路设计以及高效低能耗等特点。

The pressure provided by the hydraulic system of the briquetting machine squeezes the loose chips into dense chips through cold extrusion. It can handle steel chips, aluminum scraps, copper scraps, wood chips, grinder scraps, titanium scraps, various sawing scraps, turning scraps, etc. It has the characteristics of fully automatic work, perfect data statistics, automatic monitoring of operating conditions, unique hydraulic circuit design, high efficiency and low energy consumption, etc.

◆ Y85 压块机参数 ◆ Y85 Briquetting machine parameters

型号 Model	刀片尺寸 (mm) Blade size (mm)	电机总功率 (kW) Motor total power	减速机功率 (kW) Reducer power	产量 (kg/h) Production capacity	重量 (kg) Weight	尺寸 (mm) Dimensions
Y85-50	600, 670, 690, 690	4000/1.5kW	4000/1.5kW	150	30-50	140
Y85-60	600, 670, 690, 690	4000/1.5kW	4000/1.5kW	150	100-150	170
Y85-800C	600, 670, 690, 690	4000/1.5kW	4000/1.5kW	150	100-150	270
Y85-130	670, 690, 690, 690	4000/1.5kW	4000/1.5kW	250	150-200	300
Y85-160SC	670, 690, 690, 690	4000/1.5kW	4000/1.5kW	300	200-250	300
Y85-160	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	300	150-200	400
Y85-160SC	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	400	200-250	500
Y85-200	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	600	300-350	800
Y85-250	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-300SC	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-300	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-310	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-310	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-400	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-500	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-600	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-800	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-1000	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000
Y85-1200	690, 690, 690, 690	4000/1.5kW	4000/1.5kW	1000	350-400	1000

◆ 提升机参数 ◆ Hoist parameters

型号 Model	单斗提升重量 (kg) Single lifting weight (kg)	功率 (kW) Power (kW)	最大出力 (kg/h) Maximum output (kg/h)	配小车 With trolley
TSJ-150-1800	150	2.2	1600	XC150
TSJ-250-2000	250	2.2	3000	XC250
TSJ-400-2300	400	3	5000	XC400
TSJ-1000-YY	1000	4	-	XC-1000

◆ 螺旋料斗参数 ◆ Screw Hopper parameters

型号 Model	螺料量 (m³) Storage capacity	外形尺寸 (mm) Dimensions	单螺量 (kg) Single spiral	螺料量 (m³) Storage capacity	螺料量 (m³) Storage capacity
LC-15	1.5	1600 1500 2000	2.2	2.2	2.2
LC-20	2	2000 1500 2000	2.2	2.2	3.7
LC-30	3	2500 1500 2000	3.7	2.2	3.7
LC-40	4	4000 1500 2000	5.5	3.7	2'3.7

◆ 撕碎机参数 ◆ Shredder parameters

型号 Model	刀片尺寸及数量 Blade size and quantity	轴 (直径 x 长度) 及数量 Shaft (diameter x length) and quantity	撕碎腔 (长 x 宽) Shredding cavity (L x W)	电机功率和台数 Motor power and number of stages	减速机型号和速比 Reducer model and speed ratio
KSZ-250	Φ 130*25/20片 pieces	Φ 70*685/4 支 sticks	410*255	1'5.5kw/4P	GK/F87减速机 Reducer/70.46
KSZ-400	Φ 170*30/28片 pieces	Φ 75*720/4 支 sticks	500*420	2'4kw/4P	GK/F87减速机 Reducer/102.71
KSZ-500	Φ 150*20/50片 pieces	Φ 60*800/4 支 sticks	500*500	2'4kw/4P	GK/F87减速机 Reducer/102.71
KSZ-600	Φ 240*25/48片 pieces	Φ 90*980/4 支 sticks	740*610	2'7.5kw/4P	GK/F97减速机 Reducer/86.52
KSZ-800	Φ 260*25/64片 pieces	Φ 115*1215/4 支 sticks	810*760	2'15kw/4P	GTN9减速机 Reducer/152
KSZ-1000	Φ 280*20/100片 pieces	Φ 130*1505/4 支 sticks	1010*940	2'30kw/4P	GTN11减速机 Reducer/154
KSZ-1200	Φ 320*20/120片 pieces	Φ 155*1710/4 支 sticks	1250*1210	2'37kw/4P	GTN14减速机 Reducer/157

◆ 脱油机参数 ◆ Deoiler parameters

型号 Model	入屑口 (mm) Chip inlet	功率 (kW) Power (kW)	处理能力 (kg/h) Handling capacity (kg/h)	处理能力 (kg/h) Handling capacity (kg/h)
TS00125	350*450	1.5	70-100	0.5-0.8
TS00140	Φ 350	4	100-300	1-2
TS00150	Φ 400	4	300-500	2-3
TS00180	Φ 500	5.5	500-1000	3-5

型号 Model	功率 (kW) Power (kW)	处理能力 (kg/h) Handling capacity (kg/h)	处理能力 (kg/h) Handling capacity (kg/h)
TS00232	3	2.2	≤ 350
TS00240	4	2.2	350-550
TS00260	5.5	3	550-1000
TS00280	7.5	3	1000-1500

◎ 机器展示 Machine Display



◎ Y85压块机废料包块 Y85 Briquetting Machine Scrap Bale



7075铝刨花 7075 aluminum shavings



铝屑 Aluminum chips



团状铝刨花 Clumpy aluminum shavings



长丝铝刨花 Long filament aluminum shavings



团状铁屑 Clumpy steel chips



高碳钢铁屑 High carbon steel chips



钛屑 Titanium chips



铜米 Copper rice chips



铜米 Copper rice chips



木屑 Wood chips



团状不锈钢屑 Clumpy stainless steel chips



铸铁屑 Cast iron chips



木屑 Wood chips



黄铜 Brass chips



紫铜 Copper chips



轮胎钢丝 Tire wire



磨屑 Grinding shavings



纸屑 Paper chips



铝型材破碎料 Aluminum profile crushing material



破碎后的轻薄料 Crushed light material



◎ 客户成功案例 Customer Success Stories

